

## GEOScan: A GEOScience Facility From Space

Lars P. Dyrud, Jonathan T. Fentzke, Gary Bust, Bob Erlandson, Brian Bauer, and Aaron Q. Rogers  
 The Johns Hopkins University Applied Physics Laboratory  
 11101 Johns Hopkins Road, Laurel, MD 20723-6099 USA; (240) 543-5117  
[lars.dyrud@jhuapl.edu](mailto:lars.dyrud@jhuapl.edu)

Warren Wiscombe  
 NASA Goddard Space Flight Center  
 Greenbelt Road, Greenbelt, MD 20770 USA

Shawn Murphy  
 Charles Stark Draper Laboratory  
 555 Technology Square,  
 Cambridge, MA 02139 USA

Rebecca Bishop  
 The Aerospace Corporation  
 2310 E. El Segundo Blvd.,  
 El Segundo, CA 90245-4609 USA

Om Gupta  
 Iridium Communications Inc.  
 1750 Tysons Blvd., McLean, VA 22102-4244 USA

Brian Gunter  
 Dept. of Aerospace Engineering, Technical Univ. Delft  
 Bldg. 62, Kluyverweg 1, 2629 HS Delft, The Netherlands

Kerri Cahoy  
 Dept. of Aeronautics and Astronautics, MIT  
 77 Massachusetts Avenue, 33-207,  
 Cambridge, MA 02139 USA

Chad Fish  
 Space Dynamics Laboratory  
 1695 North Research Park Way,  
 North Logan, UT 84341 USA

### ABSTRACT

GEOScan, proposed as a globally networked orbiting facility utilizing Iridium NEXT's 66-satellite constellation, will provide revolutionary, massively dense global geoscience observations and targets questions scientists have not been able to answer, and will not answer, until simultaneous global measurements are made. GEOScan dramatically lowers the logistical and cost barriers for transmitting "big data" from 66 satellites by using Iridium's communications platform and commercial-off-the-shelf components. Iridium's Hosted Payload Program facilitates the effort, but it could be executed using any small-sat constellation. Each GEOScan sensor suite consists of 6 instruments: a **Radiometer** to measure Earth's total outgoing radiation; a **GPS Compact Total Electron Content Sensor** to image Earth's plasma environment and gravity field; a **MicroCam Multispectral Imager** to provide the first uniform, instantaneous image of Earth and measure global cloud cover, vegetation, land use, and bright aurora; a **Radiation Belt Mapping System (dosimeter)** to measure energetic electron and proton distributions; a **Compact Earth Observing Spectrometer** to measure aerosol-atmospheric composition and vegetation; and **MEMS Accelerometers** to deduce non-conservative forces aiding gravity and neutral drag studies. These instruments, employed in a constellation, can provide major breakthroughs in Earth and geospace science, as well as offering low-cost space situational awareness, surveillance, and reconnaissance opportunities. As a means of risk reduction and technology maturation, GEOScan will also leverage a pathfinder JHU/APL effort to develop several enabling technologies and flight-qualify them using a pair of nanosatellites to be launched in mid-2013.

### INTRODUCTION

The heartbeat of our Earth is set by the rising and setting of the sun. This influence, along with the interconnected nature of geoscience subsystems, means that local dynamic processes on sub-diurnal scales do not act in isolation, but aggregate to influence other subsystems on global scales. The GEOScan facility is designed to meet these system science measurement challenges by expanding the frontier of our

understanding about Earth and geospace as a complete and interconnected system.


The instrument suite designed to populate the Iridium NEXT constellation will address pressing questions about Earth's current state of energy balance and climate change, the current state of carbon balance, and nature's ability to sequester increasing CO<sub>2</sub>. In addition, this constellation of hosted payloads can address how the large-scale transport of water and atmospheric mass

affect, and respond to, changes in climate and water cycle on diurnal to annual timescales. The global response of the geospace environment to changes in solar activity can also be explored as well as the global response of the biosphere to the diurnal cycle.

### HOSTED PAYLOADS ON THE IRIDIUM NEXT SATELLITE CONSTELLATION

In its new generation of satellites, Iridium has introduced a hosting concept for small scientific payloads of up to 5 kg. Each NEXT satellite is being developed with the ability to accommodate hosted payloads on its nadir and/or RAM facing surfaces. A standard interface between the hosted payload and Iridium NEXT satellite has been defined in the Secondary (Hosted) Payload Specification, which is part of the Iridium NEXT System Performance Specification.<sup>1,2</sup>

The 66-satellite main constellation (+6 in-orbit spares), configured in 6 orbital planes with 11 evenly spaced slots per plane, provides continuous global coverage as demonstrated by the RF footprints in Figure 1. This is achieved through cross-linked satellites operating as a fully meshed network that is supported by multiple in-orbit spares to provide real-time data downlink to the Iridium operated ground station network. The constellation has a design lifetime greater than 10 years in a polar orbit at 780 km with an inclination of 86.4°.

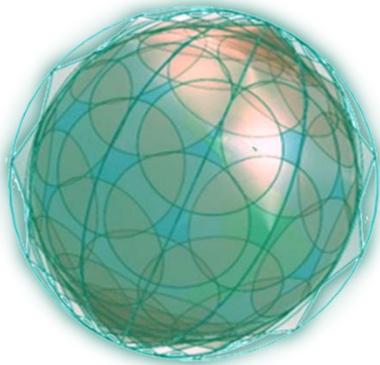

**Figure 1. Iridium NEXT satellite constellation RF footprints.**

Each Iridium NEXT satellite has a total hosted payload allocation of 50 kg in mass,  $30 \times 40 \times 70 \text{ cm}^3$  in volume, and 50 W of average power. GEOScan is designed to fit into a hosted payload module, which has been allocated 5 kg in mass,  $14 \times 20 \times 20 \text{ cm}^3$  in volume, and 5 W of average power. In addition to these resources, the Iridium satellite design provides for an unimpeded 75° half-angle nadir field of view, nadir pointing control to within 0.35° (pointing knowledge


within 0.05°), spacecraft altitude control within 10 m, and spacecraft position control within 15 km (position knowledge within 2.2 km).

**Table 1: Iridium NEXT hosted payload specifications and resource allocation for GEOScan**

Iridium NEXT Hosted Payload Specifications		Iridium NEXT Resource Allocation for GEOScan
Weight	50 kg	5 kg
Payload Dimensions	$30 \times 40 \times 70 \text{ cm}^3$	$20 \times 20 \times 14 \text{ cm}^3$
Payload Power	50-W average (200-W peak)	5 W (average), 10 W (peak)
Payload Data Rate	<1 Mbps (orbit average) 100 kbps (peak)	10 kbps (orbit average), 100 kbps (peak)

### GEOScan System Sensor Suite

The GEOScan system sensor suite is comprised of 6 instruments packaged to take advantage of the Iridium NEXT hosted payload allocation. This suite of instruments is designed to be batch manufactured to meet the cost and schedule constraints of the Iridium NEXT launch schedule and reduce costs through volume procurement, manufacture, integration, and test. The conceptual packaging of the suite of sensors is shown in Figure 2.

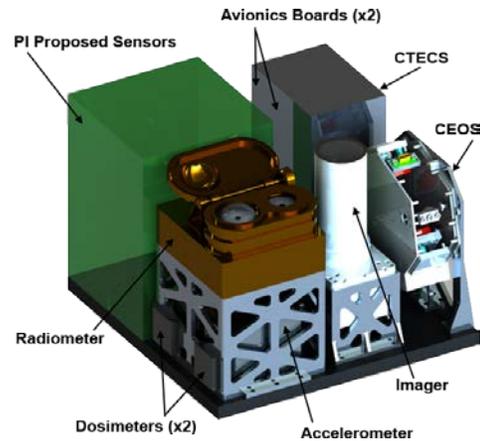

**Figure 2. GEOScan's payload design uses a modular configuration for efficient assembly and testing. It also includes additional mass, power, data, and volume allocation for sensors proposed by scientific and government stakeholders.**

### GPS: The Compact Total Electron Content Sensors

The Compact Total Electron Content Sensors (CTECS) are GPS instruments that utilize a commercial off-the-shelf (COTS) receiver, modified firmware, a custom-designed antenna, and front-end filtering electronics. In

a 24-h period, a single GPS occultation sensor can provide several hundred occultations or total electron content (TEC) measurements distributed around the globe. Even with this number of occultations, latitude and longitude sectors still remain that are under-sampled at any given instant because of the geometry of the GPS constellation. GEOScan's 66 CTECS will provide an unprecedented continuous global snapshot of Earth's ionosphere and plasmasphere. The data will allow us for the first time to see the temporal and spatial evolution of the ionosphere/plasmasphere from 80-20,000 km with 5-min temporal resolution and 10 km height resolution with a measurement error < 3 TECU globally.

Furthermore, the gravity field will be derived using the satellites' trajectories determined from the onboard CTECS GPS receivers, as well as from ancillary data from the MEMS accelerometers and Iridium star cameras. In short, the positions and velocities determined from the CTECS receiver can be differentiated to reveal the accelerations caused by the various dynamic (mass transport) processes that occur at the surface and in the atmosphere. By accurately tracking the orbit of each Iridium NEXT satellite and removing non-gravitational influences, we can infer changes in Earth's gravity field and learn about the processes that create these changes (e.g., large-scale water mass movement). Global diurnal water motion maps at 1000 km resolution, accurate to 15 mm of equivalent water height can be created on sub-weekly time scales with a time-integrated monthly resolution that matches the Gravity Recovery and Climate Experiment (GRACE) satellites.

### ***Radiometers***

GEOScan will measure Earth's outgoing radiation simultaneously and globally with a constellation of heritage-driven, two-channel radiometers carried by the Iridium NEXT commercial constellation of satellites. This constellation, each with a 127° field-of-view radiometer, will provide a global view of the Earth's **total out-going radiation (TOR)** every 2 hours with better than 0.15% accuracy. The shortwave channel (0.2-5 micron) and total channel (0.2-200 micron) along with the longwave (determined from differencing the two channels) is calibrated to a precision of 0.09 Wm<sup>-2</sup> with an accuracy of 0.3 Wm<sup>-2</sup> using a NIST traceable calibration standard.

### ***Spectrometer: Compact Earth Observing Spectrometer***

The Compact Earth Observing Spectrometer (CEOS) consists of an exceptionally small crossed Czerny-Turner spectrometer, a linear CCD array, and read-out electronics. Its modular design allows for easy

substitution of optical elements, electronics, and optical sensors to rapidly and confidently customize the optical performance to meet a wide range of science goals. This design provides spectral measurements from 200 to 2000 nm with approximately 1 nm spectral resolution from 200 - 1000 nm and 3 nm from 1000 - 2000 nm. The foreoptics design provides a 1° field-of-view, which allows 14 km resolution.

### ***Imager: Multi-Spectral MicroCam***

The Multi-Spectral MicroCam Imager (MMI) is designed to provide multispectral images on both regional and global scales. The MMI provides multispectral imagery in the same footprint within a time of 30 s, each with a spatial resolution of ~450 m (nadir). The spacing of the satellites in the constellation (11 satellites per orbital plane), and the fact that one MMI is placed on every satellite, will allow complete multispectral global imagery to be acquired every 2 hours.

GEOScan's MMI is a visible to near-infrared wide-field-of-view imager that uses a STAR-1000 CMOS imaging 1024 × 1024 array. MMI will use custom-designed strip filters oriented in the across-track direction. This will allow the imager to be used in a push-broom mode. The attitude of the Iridium NEXT constellation will be carefully controlled because each of the satellites has cross-linked communication receivers and transmitters. MMI uses refractive optics and will have a field of view (FOV) of 33° × 33° to provide global coverage over a 2-h time interval. Each FOV footprint on the surface of the Earth is 465 km × 465 km. Images will be acquired every 29 s to provide continuous imaging in the along-track direction of the satellite. The trailing satellite in a given orbital plane lags the leading satellite by ~9 minutes. In this time interval, the relative drift in longitude between a spot on the Earth and Iridium is 250 km.

### ***Dosimeter: Radiation Belt Mapping System***

GEOScan's dosimeter payload will image radiation belt dynamics, including relativistic electron micro-bursts, global loss to the atmosphere, and variations in geomagnetic cutoffs of solar energetic particles. Each GEOScan payload will contain one pair of Teledyne micro dosimeters; one is an electron dosimeter with a 100-keV electronic threshold for registering a count, and the other is a proton dosimeter with a 3-MeV electronic threshold. A common thickness of shielding covers both dosimeters. Five unique lid-shielding choices will enable aggregating over multiple vehicles to obtain a dose-depth curve and electron and proton spectra. Shielding will be chosen to provide electron energy resolution from 0.3 to 5 MeV and proton

resolution from 10 to 50 MeV. The dosimeter has more than sufficient dynamic range to measure the dose rate due to galactic cosmic rays at the geomagnetic equator for the most intense solar particle events and deep within the inner radiation belt.

#### ***Accelerometers: MEMS Accelerometer for Space Science***

The MEMS Accelerometer for Space Science (MASS) is a micromechanical, silicon-based accelerometer with unprecedented sensitivity compared to current accelerometers of similar size and power that can be used for Earth science applications. Current space-based accelerometers on GRACE and Gravity field and steady-state Ocean Circulation Explorer (GOCE) require more power (tens of watts) and mass (+50 kg) than can be accommodated within the GEOScan payload allocation. GEOScan's approach utilizes a constellation of low-noise MEMS accelerometers, which would assist in aggregately measuring the variations in Earth's gravitational field as well as satellite drag for neutral density studies. Current commercial MEMS devices have demonstrated sensitivities in the 10 ng/rtHz range, with potential for 1 ng/rtHz – clearly suitable to compensate for the non-gravitational forces of  $10^{-7}$  to  $10^{-8}$  m/s<sup>2</sup>. The performance of this class of MEMS accelerometers has shown a consistent white noise floor on the order of  $10^{-11}$  g<sup>2</sup>/Hz making the device ideal for gravimetric measurements.

#### **CONSTELLATION SYSTEM SCIENCE**

GEOScan employs a full constellation approach to answer outstanding system science questions about the Earth and remote sensing of space environment state variables. Equipping the full constellation provides homogeneity of observation, thus simplifying analyses and reducing error in inherently global calculations. This suitably dense, homogeneous network enables the


use of modern reconstruction techniques to image state variables and persistent measurement of global change across a wide range of temporal and spatial scales.

#### ***GEOScan Climate Science-Measuring Earth's Energy Balance***

GEOScan addresses Earth's current state of energy balance and climate change via a homogeneous constellation of satellites observing the Earth 24/7 with hourly temporal resolution and spatial resolution ranging from 500 km for the broadband radiometer to 450 m for the imager. This revolutionary coverage will enable discoveries concerning many open science questions critical to our ecosystems and our habitability -- notably how highly spatially and temporally variable phenomena aggregate to contribute to global change, and how global long-term changes affect smaller scales and surface processes where human beings live and work.

GEOScan's most central climate instruments are extremely well calibrated radiometers, which will measure, for the first time, the Earth radiation imbalance (ERI). ERI is the difference between incoming radiation from the Sun and the TOR. TOR is the sum of reflected solar radiation and emitted longwave radiation. How ERI and TOR change regionally and globally, and on timescales from hourly to annually, is critical for understanding climate change.

According to climate models, current climate change, including the dramatic melting of Arctic sea ice and Greenland glaciers, results from an ~0.1–0.2% imbalance between incoming solar energy and TOR. Currently, space instruments measure incoming solar radiation to >0.03%. However, TOR has never been simultaneously, globally sampled, and is accurate to no better than 1%—not good enough to resolve the imbalance predicted by climate models. GEOScan's

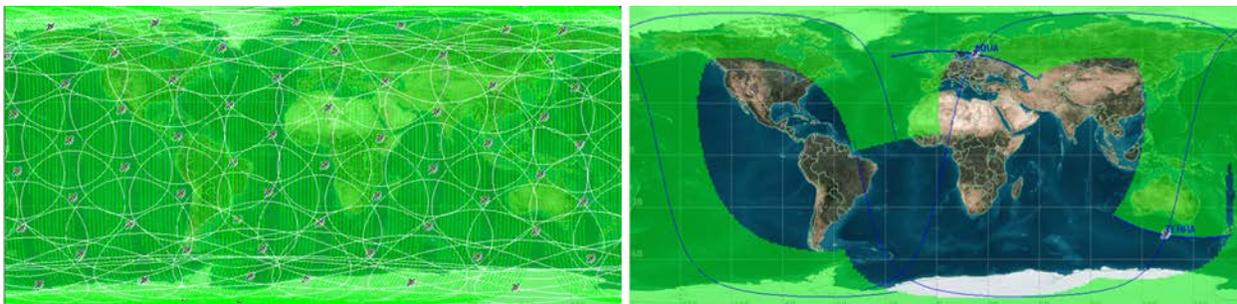

***Figure 3. GEOScan achieves the science goals by providing superior spatial, temporal, angular, and local time coverage. Spatial coverage comparison between CERES on Terra and Aqua (right) and GEOScan's bolometer radiometer (left) for 1 hour. In a single hour, GEOScan will make 3600 global TOR samples, providing a statistical noise reduction factor of 60 every hour. After 2 hours the Iridium NEXT orbital planes completely intersect, providing 100% independent yet massively oversampled TOR, from all angles.***

global coverage of highly calibrated radiometers ( $0.3 \text{ Wm}^{-2}$ ) will measure TOR at the necessary 0.1% accuracy level. See Figure 3.<sup>3,4,5</sup>

GEOScan's time-variable gravity measurements focus on the large-scale, high-frequency spectrum of the gravity field that GRACE and other dedicated gravity field missions inherently cannot observe. These other missions cannot observe the high-frequency variations solely because of the limited sampling possible resulting from single satellite ground track (or satellite pair in the case of GRACE) measurements. The error caused by under sampling (independent of measurement accuracy) dominates any gravity solution at the daily to weekly timescales for a small number of satellites. This highlights the fact that with only one satellite pair, higher spatial resolution compromises temporal resolution and vice versa; the only way to improve both is to dramatically increase the number of satellites involved. GEOScan, with its 66-satellite constellation approach, addresses this short-coming in traditional gravity science investigations. The GPS measurements will track the orbits of the satellites to an accuracy of 2-3 cm, which, along with the data from the MEMS accelerometers, makes it possible to recover large-scale ( $>1000 \text{ km}$ ) gravity variations, which result mainly from the large scale movement of water mass.<sup>6</sup>


### ***Transformational Space Weather Nowcasting and Forecasting with the GEOScan Constellation***

Significant progress has been made in the study of the Earth's geospace environment over the last few decades. We have a firmly established understanding of the system dynamics on a climatological basis along with a basic understanding of the universal physics of small-scale processes of waves, instabilities, magnetic reconnection, and energetic neutral atoms (ENAs). Yet accurate *nowcast*, much less forecast, of the details of individual space weather events remains elusive. We lack an understanding of the fundamental global properties of our system, such as determining what is the total energy input into the thermosphere, whether Hall or Pederson currents are primarily responsible for auroral current closure, and which mechanisms dominate radiation belt losses and their longitudinal extent.

Nowcasting and forecasting the global electron density field for space weather applications are difficult research operational challenges that have not yet been met. Operational requirements for electron density [Air Force, *IORD-II*] include profiles of electron density from  $\sim 80 - 1500 \text{ km}$  altitude, with  $\sim 5 \text{ km}$  vertical resolution, and  $\sim 50\text{-}100 \text{ km}$  horizontal resolution with errors in electron density  $< 10\%$ . That is a global 3D electron density field from 80-1500 km altitude with 5

km vertical resolution and 50-100 km horizontal resolution. First principle models cannot achieve such resolutions and accuracy. Data assimilative models can achieve all the above requirements, but *only with sufficient amounts of data*. In order to meet such stringent requirements over the entire globe, all the time, it is clearly necessary to have continuous global data coverage. This data coverage must be sufficient to sample the entire ionospheric profile with the required vertical resolution, and have the necessary horizontal resolutions. No existing data set, nor even combination of existing data sets, can meet this requirement. Thus, while in principle we have the theoretical understanding and numerical tools in place to provide required global nowcasts and forecasts of electron density, we do not have the necessary observational data. In addition to ionospheric nowcasting, there is a need for imaging the plasmasphere on a global, temporally updating scale. Plasmaspheric imaging is important since plasmaspheric densities impact the physics of the radiation belts. Plasmaspheric imaging to 20,000 km combined with radiation belt mapping of energetic electrons and protons will allow us to understand which loss processes dominate at different temporal and spatial scales. However, up until now there are almost no available direct measurements of plasmaspheric density.

GEOScan provides a transformative capability by providing the global data coverage necessary for the aforementioned investigations. GEOScan radio occultations will sample the ionosphere from 80 km altitude to the IRIDIUM satellite altitude of 780 km, Topside TEC observations provide information from the satellite altitude to the altitude of the GPS constellation ( $\sim 20,000 \text{ km}$ ). Each GEOScan satellite will continuously monitor 10-15 topside TEC measurements to different GPS satellites, providing an almost overwhelming amount of topside and plasmaspheric data that can be used in tomographic imaging algorithms to obtain accurate, time evolving images of plasmaspheric density. For the radio occultations, each GPS receiver sees  $\sim 3$  occultations at a time. Each occultation lasts  $\sim 1$  minute. Over a 5 minute period we have a total of  $66 \times 3 \times 5 = 990$  occultations / 5 minute period. While this data alone only provides  $\sim 600 \text{ km}$  horizontal resolution, when combined with the copious amounts of ground GPS TEC data available (currently  $> 4000$  sites and growing), we can easily achieve the required horizontal resolutions necessary to meet Air Force IORD-II requirements. A beautiful aspect of this constellation design is global continuous data that can be streamed to ground systems in near real-time. This allows, for the first time, global high-resolution, high accuracy nowcasts of electron density to be provided continuously

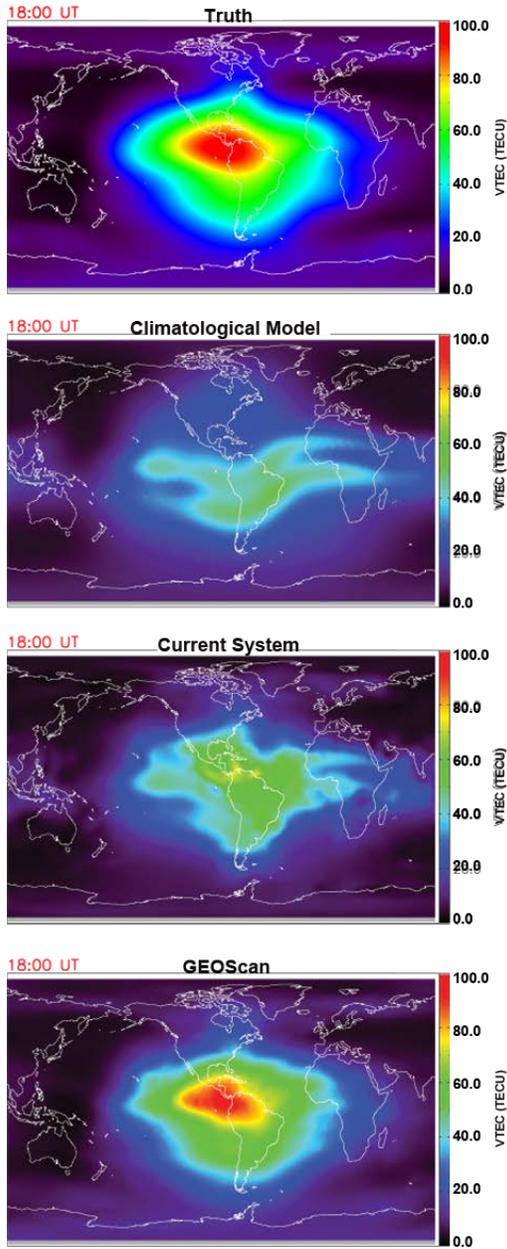

**Figure 4. GEOScan tomographic imaging will fundamentally change our ability to understand geospace plasma dynamics. The top plot shows TIME-GCM simulated ionosphere for the geomagnetic super storm on 20 November 2003, treated as “truth” for simulating our observing system. This event is a strong “weather” departure from climatological predictions (IRI panel). The third panel shows that our existing ground-based GPS is grossly inadequate for imaging this event, whereas GEOScan observations alone (bottom panel) accurately capture the global dynamics of the geospace environment. The RMS TEC errors of the simulation shown are: IRI-16 TECU, ground-based GPS – 11 TECU, GEOScan only – 2.8 TECU.**


in time. This is accomplished using global tomographic or data assimilation imaging methods such as Ionospheric Data Assimilation Four Dimensional (IDA4D).<sup>7,8,9</sup> When combined with first principle models, where the global density field is used to re-initialize the model, it becomes possible to provide accurate forecasts that are only limited by the accuracy of the forward model.

To illustrate the transformational ionospheric imaging capability of GEOScan, Figure 4 presents results from a GEOScan tomographic simulation experiment. As a data source, all 66 Iridium satellites were simulated for a full day, with only the GPS radio occultation data simulated. The actual GPS ephemeris for the satellites was used to assure accurate and realistic simulation scenarios. The day simulated was that of the November 20, 2003 geomagnetic super storm. The top plot shows first principle ionospheric model TIME-GCM treated as “truth” for simulating our observing system. This event is a strong “weather” departure from climatological predictions (second panel from top IRI climatological model). The third panel shows that our existing ground-based GPS is grossly inadequate for imaging this event, whereas GEOScan observations alone (bottom panel) accurately capture the global dynamics of the geospace environment. The RMS TEC errors of the simulation shown are: IRI-16 TECU, ground-based GPS – 11 TECU, GEOScan only – 2.8 TECU.

### **GEOScan Gravity Imaging**

The time-variable gravity products created from GEOScan seek to provide new insights into the large-scale (>1000km), short-term (< 1month) mass transport processes governing the global water cycle. Any process that involves the transport of water, such as the melting of glaciers in the cryosphere, changes in continental hydrology (e.g., groundwater), or other processes in the oceans and atmosphere, creates a change in Earth’s gravity field. By precisely measuring the variations of Earth’s gravity over time, we can exploit this link and understand more about the behavior of these processes.

How the time-variable gravity field can be measured by GEOScan’s sensor suite is relatively straightforward, and is driven by the fact that changes in Earth’s gravity field, however small, will alter the trajectory of an orbiting satellite.<sup>6</sup> Using the CTECS GPS receiver, the absolute position of each Iridium NEXT satellite will be precisely determined, down to the cm level. These positions can then be differentiated to create a time series of satellite accelerations that represent both gravitational and non-gravitational forces. Those accelerations caused by non-gravitational forces, such as atmospheric drag and solar radiation pressure will be

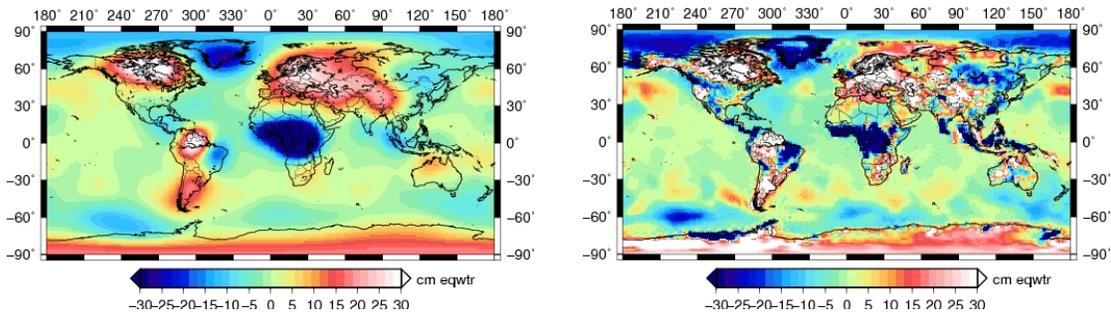

**Figure 5. Illustration of the daily resolution expected from the GEOScan gravity products (right panel), as derived from a high-resolution coupled Earth system model (left panel). Units are in equivalent water height.**

accounted for by the information provided by the onboard MEMS accelerometers, leaving as a final product only those accelerations due to Earth's gravity.

NASA's GRACE mission was the first to highlight the value of time-variable gravity data; however, despite its tremendous success, GRACE suffers from the measurement sampling limitations related to having only a single satellite pair. Since gravity observations are essentially point measurements, the spatial and temporal coverage of a single satellite will never permit the observation of high-frequency events, and this is why the temporal resolution for GRACE is approximately one month. While GEOScan will not be able to match the spatial resolution of GRACE, the time variable data collected from the full constellation of Iridium NEXT satellites will allow the monitoring of large-scale processes at the Earth's surface at time scales as short as one day. Global gravity data at this temporal resolution has never been collected before, and should be especially valuable to the ocean and atmosphere communities. Figure 5 demonstrates the potential quality of the GEOScan gravity products (right panel) from a single day's worth of measurements, compared to the full high-resolution signal (left panel) over the same timeframe, as derived from a recent coupled Earth system model.<sup>10</sup> As can be seen, a number of terrestrial and oceanic/atmospheric mass transport processes are clearly observed, with the spatial resolution corresponding to approximately 1000 km.

### NANOSATELLITE PATHFINDER


Advances over the past decade in highly reliable commercial electronics, miniaturization techniques, and materials have enabled a new class of small "nanosatellites," loosely defined as satellites having a total mass of 50 kg or less<sup>11</sup>, that now afford the capability to execute a broad array of meaningful science, technology, and national security missions. A subset of this system-class, CubeSats, are canonically defined as single unit (1U) spacecraft with nominal

stowed volume of 10x10x10 cm and mass of about one kilogram<sup>12</sup>. Capitalizing on significant, otherwise unused launch vehicle (LV) volume and lift mass capability, the first CubeSats were launched as opportunistic rideshares in 2000. Through repeated manifest successes, confidence was established such that they could be safely and readily incorporated into the LV and mission plan without impact to the primary payload<sup>13</sup>. Catalyzed by the emerging means by which to dramatically lower the cost and programmatic barriers to space access, there is growing global interest to find further ways to increase nanosatellite launch accommodation to form-factors larger than 3U CubeSat that offer greater mission capability<sup>14</sup>, and in quantities well in excess of 10 free-flyer deployments per mission<sup>15</sup> that now permit fielding operational constellations (on a per plane basis).

Responding to the diverse needs of US Government sponsors for smaller spacecraft to more effectively utilize access to space, JHU/APL has created a flexible and modular, Multi-Mission Nanosatellite (MMN) spacecraft architecture for low-cost execution of critical missions spanning civil and national security applications. Among the many enabled applications, JHU/APL has been conceptually exploring the means by which key space weather phenomena could be observed with greater spatial and temporal distribution using nanosatellites<sup>16</sup>. To support this broad endeavor, JHU/APL has developed an initial triple (3U) CubeSat hardware prototype under a pathfinder effort, with two flight units scheduled for launch in the spring of 2013.<sup>13,17</sup>

As shown in Figure 6, the Multi-Mission Bus Demonstration (MBD) was designed to be an opportunistic satellite, capable of operating across a broad envelop of orbits that might be served by rideshare opportunities, with a modular payload interface to readily accommodate alternate instruments/sensors. Given the inherent packaging challenges of the CubeSat form-factor, MBD employs a highly-integrated design approach to incorporate all the

critical subsystems found within a typical large mission satellite, with the requisite functionality to support a wide variety of missions. Several of these elements can and/or will be leveraged for GEOScan, including:

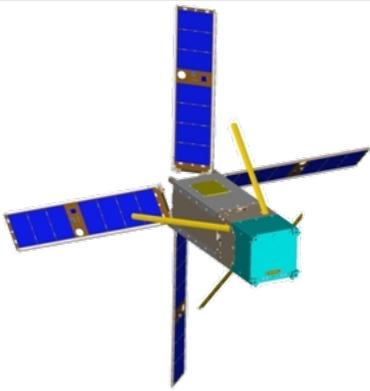

**Figure 6: The JHU/APL Multi-Mission Bus Demonstration program, scheduled to launch in mid-2013, has a modular payload interface (blue), and will be a pathfinder for several key GEOScan technologies.**

#### **Global Positioning Subsystem (GPS)**


An integrated NovAtel OEMV-1G GPS receiver is utilized onboard to supply periodic measurement of position and velocity data necessary for deriving an ephemeris solution, as well as provide an accurate time reference for calibrating precision clocks and other payload electronics as required. In addition to these functions, for GEOScan, the physically equivalent OEMV-1DF would be considered as a means to conduct radio occultation experiments.

#### **LEON3FT Processor**

A high reliability 32-bit LEON3FT processor with fault tolerant technology, was chosen for its combination of performance, low power quiescent state, and ability to operate in the harsh space environment.


#### **Real-Time Operation System & Flight Software**

Free, open-source Real-Time Executive for Multi-processor Systems (RTEMS) was selected for the real-time operating system (RTOS) and compatibility with the LEON3FT processor. An Operating System Abstraction Layer (OSAL) was able to facilitate the development process through compatibility with existing tools, as well as leverage some heritage code previously developed at JHU/APL for the NASA Solar TErestrial Relations Observatory (STEREO) mission.

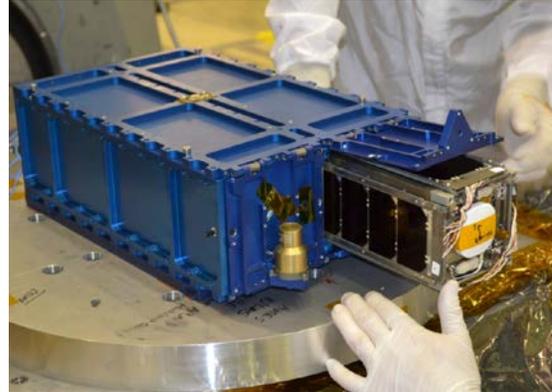

**Figure 7: One of the two MBD satellites being stowed into the NASA NLAS dispenser.**

MBD is designed to be compatible with the P-POD or other 3U dispenser systems, such as the NASA Nanosatellite Launch Adapter System (Figure 7), which can accommodate two 3Us or a single 6U spacecraft. As shown in Figure 8, a complete testing campaign for the program, including thermal balance, was conducted in the summer of 2011; the two spacecraft are presently in storage awaiting their planned launch next year.

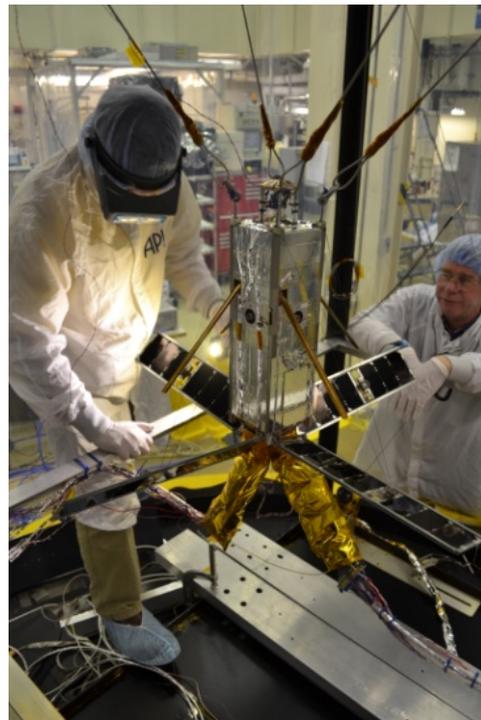

**Figure 8: MBD being prepared for thermal balance testing at JHU/APL. The design was exercised over a broad thermal environment envelop to guarantee its suitability across a variety of orbit conditions.**

## SUMMARY

The GEOScan facility has been designed to meet the needs of a diverse user community and address measurement needs from the surface to geospace that enable transformative discovery. The Iridium NEXT satellite constellation provides real-time data with dense, frequent, and global measurements from the GEOScan sensor suites. This hosted payload consisting of 6 instruments is poised to address a wide array of outstanding science questions as well as compliment existing ground and space based assets for purposes of space weather nowcasting and space situational awareness. The Iridium NEXT constellation with its 10+ year lifetime will provide scientists and decision makers with valuable data at a fraction of the traditional cost of dedicated monolithic missions due to the use of COTS parts and a scientific hosted payload design that is mated to the Iridium business model and launch schedule. GEOScan and the Iridium NEXT hosted payload opportunity demonstrate the synergetic potential of public-private partnerships that leverage commercial space opportunities and scientific measurement goals.

## REFERENCES

1. Iridium Communications, "Hosted Payloads," <http://www.iridium.com/about/IridiumNEXT/HostedPayloads.aspx> (2011).
2. Space Dynamics Laboratory, "Iridium NEXT Secondary Payload Sensor Pod Interface Control Document, Document No. SDL/10-352," <http://www.iridium.com/DownloadAttachment.aspx?attachmentID=1223>, 2010.
3. Church, J.A., N.J. White, L.F. Konikow, C.M. Domingues, J.G. Cogley, E. Rignot, J.M. Gregory, M.R. van den Broeke, A.J. Monaghan, and I. Velicogna, "Revisiting the Earth's sea-level and energy budgets from 1961 to 2008," *Geophys. Res. Lett.*, 38 (L18601), 2011.
4. Loeb, N.G. , J.M. Lyman, G.C. Johnson, R.P. Allan, D.R. Doelling, T. Wong, B. Soden, and G. Stephens, "Observed changes in top-of-the-atmosphere radiation and upper-ocean heating consistent within uncertainty," *Nat. Geosci.*, 5:110-113, doi:10.1038/NCEO1375, 2012.
5. Trenberth, K.E. and J.T. Fasullo, "Climate Change: Tracking Earth's Energy," *Science Perspectives*, 328: 316-317, doi:10.1126/science.1187272, 2010.
6. Gunter, B.C., J.G. Encarnaçao, P.G. Ditmar, and R. Klees, "Using satellite constellations for improved determination of Earth's time-variable gravity," *J. Spacecr. Rockets*, 48(2):368-377, 2011.
7. Bust, G.S., D. Coco, and J.J. Makela, "Combined ionospheric campaign: 1. Ionospheric tomography and GPS total electron count (TEC) depletions," *Geophys. Res. Lett.*, 27, 2849 – 2852, 2000.
8. Bust, G.S., T.W. Garner, and T.L. Gaussiran II, "Ionospheric Data Assimilation Three-Dimensional (IDA3D): A global, multisensor, electron density specification algorithm," *J. Geophys. Res.*, 109, A11312, doi:10.1029/2003JA010234, 2004.
9. Bust, G.S. and C.N. Mitchell, "History, current state, and future directions of ionospheric imaging," *Rev. Geophys.*, 46:RG1003, doi:10.1029/2006RG000212, 2008.
10. Gruber, T.H., J.L. Bamber, M.F.P. Bierkens, H. Dobslaw, M. Murböck., M. Thomas, L.P.H. van Beek, T. van Dam, L.L.A. Vermeersen, and P.N.A. M. Visser, "Simulation of the time-variable gravity field by means of coupled geophysical models." *Earth Syst. Sci. Data*, 3 :19–35, doi:10.5194/essd-19-2011, 2011.
11. University Nanosat Program (UNP) Nanosat-5 User's Guide, UN5-0001, Feb. 2007.
12. CubeSat Design Specification: [http://cubesat.atl.calpoly.edu/images/developers/cds\\_rev12.pdf](http://cubesat.atl.calpoly.edu/images/developers/cds_rev12.pdf)
13. Rogers, A.Q., and R.A. Summers, "Creating Capable Nanosatellites for Critical Space Missions," *Johns Hopkins APL Technical Digest*, Volume 29, Number 3, pp. 283-288, 2010.
14. Apland, T. Clint, A.Q. Rogers, D.F. Persons, S.R. Vernon, R.A. Summers, and L.A. Kee, "A Flexible Launch Vehicle Adapter System for 30-50 kg Nanosatellite Missions," *IEEE Aerospace Conference*, Big Sky, Montana, March 3-10, 2012.
15. Atchison, J.A., A.Q. Rogers, and S.J. Buckley, "An Operational Methodology for Large Scale Deployment of Nanosatellites into Low Earth Orbit," *AAS 11-462, AAS/AIAA Astrodynamics Specialist Conference*, Girdwood, Alaska, July 31 - August 4, 2011.
16. Rogers, A.Q., L.J. Paxton, and M.A. Darrin, "Small Satellite Constellations for Measurements of the Near-Earth Space Environment." In R. Sandau, H-P. Roser, A. Valenzuela (Eds.), *Small Satellite Missions for Earth Observation: New Developments and Trends* (pp. 113-121), Berlin: Springer, 2010

17. Knuth, A.A., P.M Huang, and A.Q. Rogers, "Multi Mission Bus Demonstration: A Unique Low-Cost Approach for End-to-End SensorSat Development," Reinventing Space Conference, Los Angeles, CA, May 7-10<sup>th</sup>, 2012.